

## Firmware 1.20.0 for Hasselblad H6D-50c and H6D-100c

The 1.20.0 release is a feature and maintenance release for the H6D cameras that adds new functionality:  
**See User Guide version 1.7 for more detailed information.**

### New features:

- Crop Modes. Add a selectable crop mask to Live View and the RAW file.
- Backup storage option added. Save same file (3FR, JPG and MP4) to both cards.
- Added exposure info in Live View Spirit Level Overlay.
- New menu: Image.
- Support for additional memory cards.

### Improvements compared to v1.19.0:

- Fixed a bug that could cause battery drain in power off mode.
- Added Exif tag: Lens Model is added to Meta Data.

### Update procedure

Make sure that you use a fully charged battery on the camera. A charge level of 50% or more is required. Please note that the update procedure normally takes about 7-10 minutes, but can in some cases take up to 12 minutes.


### IMPORTANT NOTES:

- It is not allowed to have the USB cable inserted during the update process.
- It is not possible to downgrade to 1.16.x
- Wait until the message “Update Finished” is shown. Then remove and reinsert the battery.


Copy the downloaded file (H6D\_v1\_20\_0.cim) to the memory card and insert it into the camera. Then follow the procedure below:



1: Select the “General Settings Menu” from the main menu.

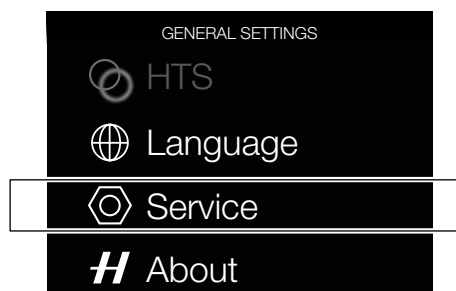

2: Select “Service”

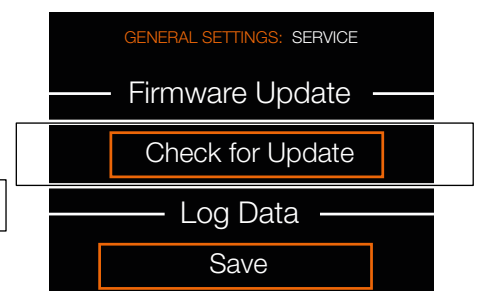

3: Click “Check for Update” and select the file “H6D\_v1\_20\_0.cim” from the list. Finally click “Update”.